




HP Pavilion dv6000 LCD Screen Replacement

Replace the LCD in your HP Pavilion dv6000.

Written By: Ben Hirsch

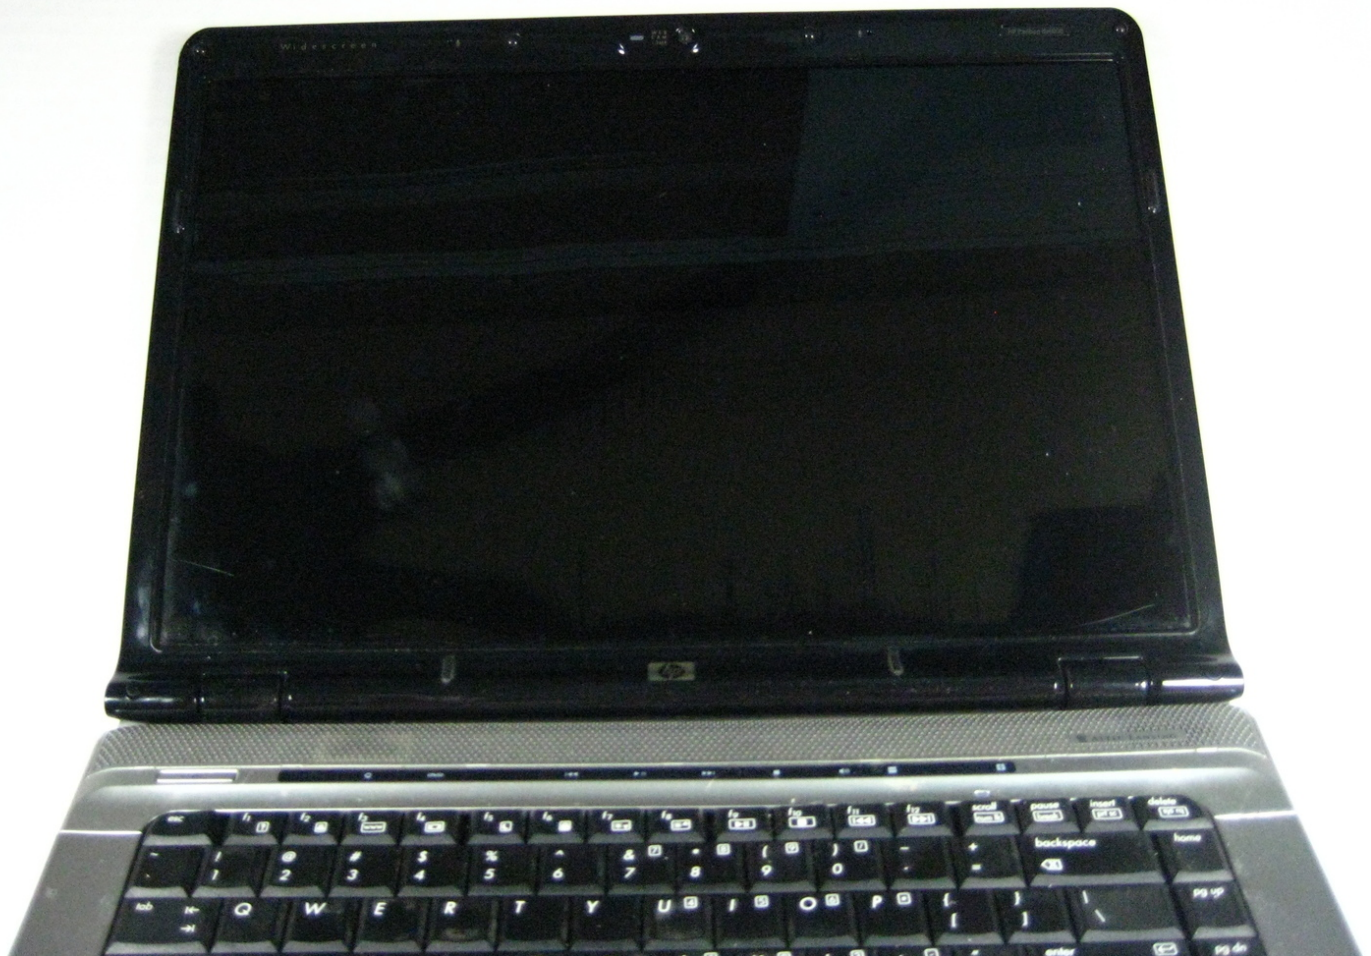

INTRODUCTION

Replace the LCD in your HP Pavilion dv6000.



TOOLS:

- [Phillips #1 Screwdriver](#) (1)



PARTS:

- [15.4" PC Laptop LCD LTN154AT07](#) (1)

Step 1 — LCD Screen




- Remove rubber screw covers from the LCD screen. The top covers pop off with a fingernail but the two on the bottom may require a screwdriver or flat tool.
- Remove the six 7.15mm screws underneath the stoppers. There are four on top and two on bottom.

Step 2



- Press the tabs on the sides of the screen in and pop the plastic off. Careful, the plastic is very flimsy and may break.

Step 3

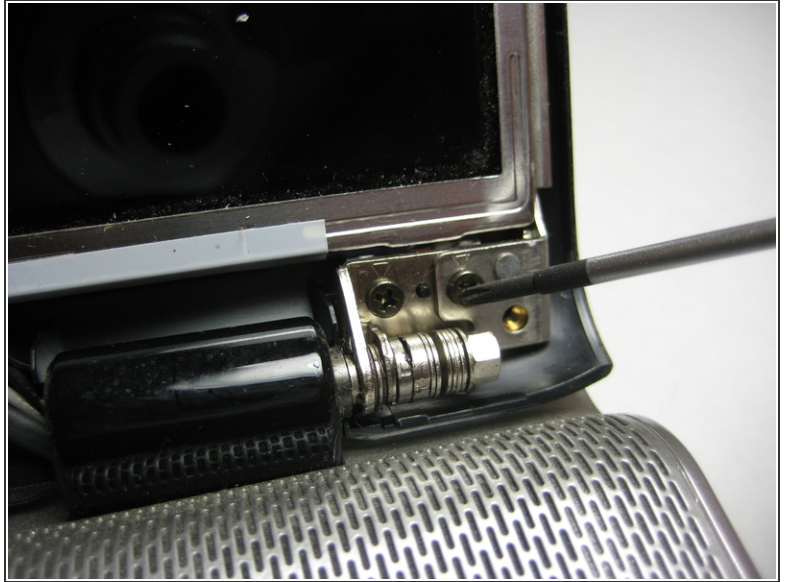


- Remove the two screws (5.8mm) on either side of the LCD near the hinge. Remove the screws on the outermost side first.

Step 4






- Take out the two 3.58mm screws on the LCD at the top (one on each edge).

Step 5

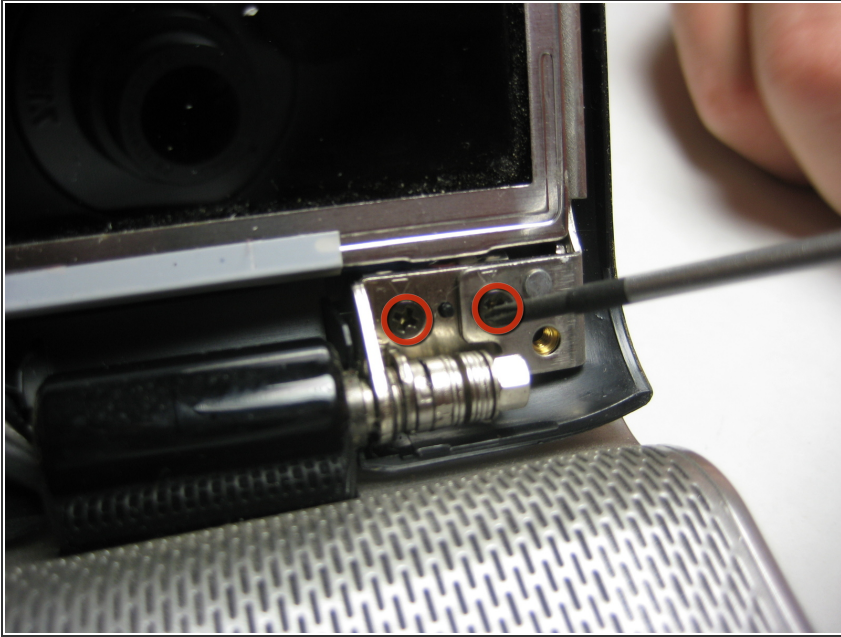

- Hold on to the LCD screen to prevent it from falling over and remove the two 3.58mm screws on the sides at the bottom.

Step 6

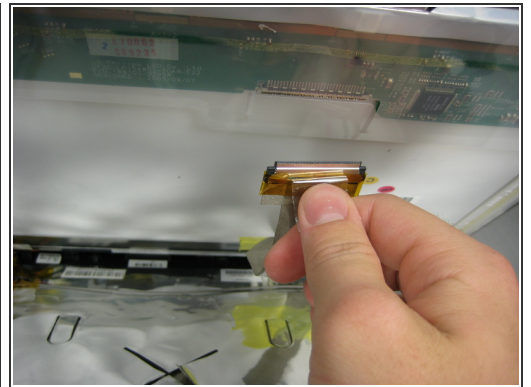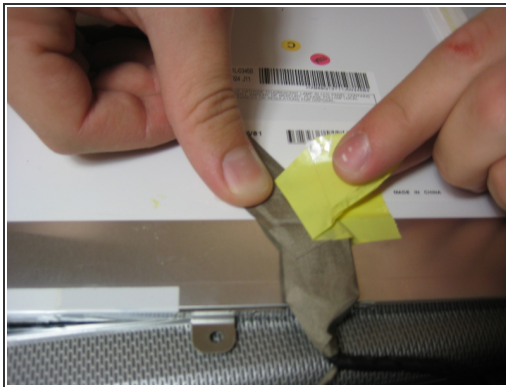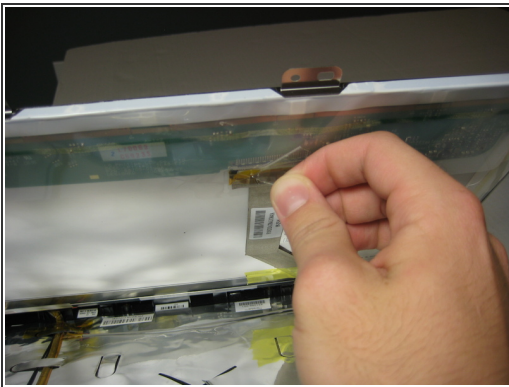

- Let the screen gently rest on the keyboard.
- Remove the tape from the ribbon.
- ⓘ Stop here and check the cable

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-21 01:42:04 PM.